

(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
10 July 2003 (10.07.2003)

PCT

(10) International Publication Number
WO 03/055357 A1(51) International Patent Classification⁷: **A47C 1/032**,
3/026 // 9/02

(21) International Application Number: PCT/NO03/00001

(22) International Filing Date: 6 January 2003 (06.01.2003)

(25) Filing Language: Norwegian

(26) Publication Language: English

(30) Priority Data:
20020045 4 January 2002 (04.01.2002) NO(71) Applicant (for all designated States except US): **STOKKE GRUPPEN AS** [NO/NO]; N-6260 Skodje (NO).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **WULLUM, Ole, Petter** [NO/NO]; Høiliveien 17, N-7052 Trondheim (NO).(74) Agent: **OSLO PATENTKONTOR AS**; P.O. Box 7007 M, N-0306 Oslo (NO).

(81) Designated States (national): AE, AG, AL, AM, AT (utility model), AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA,

CH, CN, CO, CR, CU, CZ (utility model), CZ, DE (utility model), DE, DK (utility model), DK, DM, DZ, EC, EE (utility model), EE, ES, FI (utility model), FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK (utility model), SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

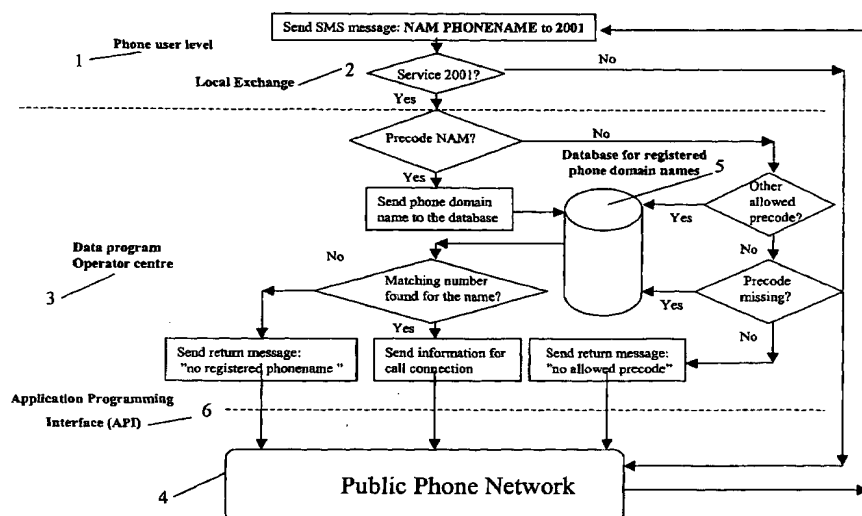
(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii)) for the following designations AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC,

[Continued on next page]

(54) Title: MOBILE JOINT WITH SEVERAL STABLE POSITIONS, SUITABLE FOR USE IN FURNITURE



(57) Abstract: The present invention relates to a mobile joint (1) for a seating construction, especially a chair, for mounting between a seat device and a base, comprising at least two joint elements (10, 30) which are reciprocally restricted pivoted between two extreme positions to allow tilting movement of the seating construction effected by the users weight displacement, comprising two outer joint elements (10, 30) which are pivoted related with a middle joint element (20), wherein the rotational axis (40, 50) between the two joint elements (10, 30) and the middle joint element (20) is displaced in relation to each other in the horizontal direction, whereby the joint (1) may assume a stable tilting position between the two extreme positions.



SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW, ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG)

— of inventorship (Rule 4.17(iv)) for US only

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Mobile joint with several stable positions, suitable for use in furniture.

Background of the invention

The present invention relates to a mobile joint with
5 several stable positions suitable for use in furniture such as a chair, and especially a reclining chair.

Prior art

Several types of mobile joints between the seat and base of chairs are known from prior art, especially in office
10 chairs. However, these chairs usually only have two extreme stable positions, such as a sitting position and a relaxing position. In order to use these chairs between the extreme positions, the joint must usually be locked, typically by means of a handle or similar device. Such handles are
15 usually difficult to find or reach, as they should preferably not be conspicuous in relation to the appearance of the chair. When such handles are more accessible, they easily get in the way of the user and are more subject to wear and breakage.

20 Further, there exist several different recliners with reclining backrest. In these chairs, the chair back may often be reclined by leaning backwards, and pivoting joints or rails are used in different embodiments to enable movement. In order to provide resistance against this
25 movement, friction elements or springs for example are used. It is also common in this type of chair that the friction elements may be locked, or that other locking mechanisms may be used in order to lock the chair in a chosen position. In some chairs, the seat is also moved as
30 a function of the movement of the back, such as forward and slightly upwards. A disadvantage of these chairs is that

force must be used to move the back of the chair and/or to lock the back in an intermediate position.

There are also chairs which may move between several stable positions by the use of runners, approximate to a rocking chair, but which also consists of straight segments that
5 are positioned at an angle in relation to each other. The user may thereby move the chair between fixed positions by changing his centre of gravity in relation to the segments. The problem with this solution is that the runners become
10 large and bulky, and that it is possible to trap ones foot under the runners for example. Furthermore, it is difficult to dampen the movements, and the chair will not go back to any particular initial position.

In order to obtain a good resting position and good blood
15 circulation, it has proven advantageous to rest ones feet in a relatively high position, such as at the height of the heart. This possibility is limited in the aforementioned chairs.

There exists therefore a need for a joint for chairs,
20 wherein a chair seat with backrest may be tilted to more than two stable positions in relation to the support, in a simple manner, without the need for using handles or other operating devices. The joint should additionally be compact and robust, and be adjustable to the user, and should
25 preferably return to an initial position when the chair is not in use.

Brief description of the invention

The object of the present invention is to provide a joint for a chair that solves the above problems and satisfies
30 the shortcomings of earlier solutions.

The object is achieved by a mobile joint, as defined in the patent claims, comprising a mobile joint for a seating

construction, especially a chair, for installation between a seat part of the seating construction and a support for the same, comprising at least two joint elements which are reciprocally limited pivoted between two extreme positions
5 to allow a tilting movement of the seating construction effected by the users weight displacement, characterised in that it comprises two outer joint elements that are pivoted connected to a middle joint element, wherein the pivoted axles between the two outer joint elements and the middle
10 joint element is displaced in relation to each other in the horizontal direction, whereby the joint may assume a stable pivotal position between the two extreme positions.

Description of the figures

Figure 1 shows a profile of a joint according to the
15 invention used between the base and seat of a chair.

Figure 2 shows a perspective view of the joint in figure 1.

Figure 3 shows the joint in figure 1 in one position.

Figure 4 shows the joint in figure 1 in an alternative position.

20 Figure 5 shows the joint in figure 1 in an alternative position.

Figure 6 shows a section from the side of the joint in figure 2.

Figure 7 shows a section from the side of the joint in
25 figure 3.

Figure 8 shows a section from the side of the joint in figure 4.

Figure 9 shows a profile of an alternative embodiment of a joint according to the invention used between a chair base and seat.

5 Figure 10 shows a perspective view of the joint in figure 8.

Figure 11 shows a section from the side of the joint in figure 8 in one position.

Figure 12 shows the joint in figure 10 in an alternative position.

10 Figure 13 shows the joint in figure 10 in an alternative position.

Detailed description

The invention will now be described in more detail by the examples of embodiments below, in association with the
15 figures mentioned above. The examples are meant to give a better understanding of the invention and thus do not limit its scope.

In the following description the terms "foremost" and "forward" are used for the direction the user looks
20 towards, when he or she is sitting with their back against the back of the chair in a normal way, and the terms "rear" and "backward" regard the opposite direction, unless specifically indicated to the contrary.

Further, references to the angle of the joint should be
25 understood as the angle between the sitting area of the chair and the support, for example the floor. In the indicated embodiments, this corresponds to the angle between the upper and lower area of the described joint, but this is not necessarily the case in other embodiments
30 of the joint.

Example A

As shown in figure 1, the joint 1 according to the invention is suited as a binding joint between chair seat 100 and a base 200. The base 200 often consists of a vertical base rod, which may perhaps be pivoted/rotational, and a mainly horizontal base foot with a dimension that should prevent the chair from tipping over when the base is not fixed to the support.

In this embodiment the joint 1 is assembled as shown in figure 2, namely by three joint elements 10, 20 and 30 which are joined by pivoted axles 40 and 50. Each joint element may be pivoted between two extreme positions in relation to each joint element that it is connected to.

When the joint 1 constitutes a joint between a seat of a chair 100 and a base 200 as in figure 1, or another solid element, the joint elements will be designated as "lower joint element" 10, "middle joint element" 20 and "upper joint element" 30.

In this embodiment the lower joint element 10 is principally parallel to the support and perpendicular to the base rod. The lower joint element 10 will be arranged with the base 200 and is joined to the lower end of the middle joint element 20 via a horizontal pivoted axle 40. The middle joint element 20 is further joined in its upper end to the upper joint element 30 via a horizontal axle 50 which is arranged in parallel with the axle 40. The upper joint element 30 will be arranged with the seat of the chair, and is principally in parallel with the sitting area of the chair seat. The upper area of the upper joint element 30 is thus suited as a fastening surface for the chair seat underside.

The joint 1 may assume three stable positions depending on the users placement of their centre of gravity in relation

to the axles 20 and 40, in that the joint elements 10, 20, 30 cooperate as mentioned above.

In figure 3 the joint 1 is shown in an initial position wherein the user's centre of gravity 300 is localised in front of both axles 40 and 50. The joint 1 then has an angle α (between the upper area 31 of the joint and the support, see fig. 6), which may be any angle which is suitable for the intended use, and in this case is for example about 8° , when the chair is to be used for sitting up straight.

In figure 4 the joint is shown in an intermediate position, wherein the user's centre of gravity 300 is placed between the two axles 40 and 50. The joint 1 then has an angle β , which in this case is larger than α , for example about 18° .

In figure 5 the joint is shown in an extreme position wherein the user's centre of gravity 300 is placed behind both the axles 40 and 50. The joint then has an angle θ , which in this case is larger than both α and β , for example about 30° .

The joint 1 is preferably spring-loaded, but this is not necessary. The spring-loading may strain the joint 1 forward towards its initial position such that the chair will return to this position when it is not strained by the user. Furthermore, the spring-loading will dampen the motions of joint 1 and provide smooth transition between the aforementioned stable positions. This leads to comfortable movement and better security against sudden movements by the user who may tip the chair over. The spring-loading may generally be adapted to aspects such as the user's weight, the weight of the chair seat, the angle between the sitting area and the back of the chair, as well as the mounting position of the chair seat in relation to the joint.

The spring-loading of the axles 40 and 50 is in this embodiment provided by torsion springs and are equipped with the option of adjusting the springs, which may be tightened or loosened to accommodate more precisely to the user's weight.

In order to achieve the aforementioned cooperation between joint elements 10, 20 and 30, reference is made to figure 6, wherein the fitting surface of the joint elements and blocking elements are shown.

10 In figure 6 the joint 1 is in the initial position as shown in figure 3. In this embodiment the joint elements are designed such that the outer joint elements 10 and 30 have blocking elements 11 and 32 respectively, projecting into the middle joint element 20.

15 The projecting blocking element 11 has an upper fitting surface 12, optionally equipped with a rotational stopper 13, abutting against a cooperating upper fitting surface 21 on the inner wall of the middle joint element 20, which hinders the middle joint element 20 from further movement forwards. Similarly, the projecting blocking element 32 has an upper fitting surface 33, optionally equipped with a rotational stopper 34, abutting against a corresponding fitting surface 22 on the inner wall of the middle joint element 20, hindering the upper joint element 30 in further movement forward.

The rotational stoppers serve to dampen the impact of the fitting surfaces on contact between these, and in reducing bothersome sound, and may for example be made of a polymer material. The rotational stoppers may be fastened to any of the corresponding fitting surfaces or both.

The lower joint element 10 may be equipped with parts for a connecting element, such as a guide 15, such that the joint 1 may optionally be fastened to a base. Similarly, the

upper joint element 30 may be equipped with an upper surface 31 prepared for fastening to a chair seat, for example by fastening bolts and/or a track arrangement.

In this embodiment the axle 50 consists of an inner pivot
5 element 51 and an outer pivot element 52, reciprocal
connected by a torsion spring (not shown) in a manner that
is known as such, fastened to the upper joint element 30
and the middle joint element 40 respectively, or vice
versa. The spring-loading of axle 50 may optionally be
10 adjusted by a torsion arm 53 adjusted by a screw device
(not shown) through adapted openings 54 and 37 in the
torsion arm 53 and the upper joint element 30 respectively.
Similarly, the axle 40 consists of an inner pivot element
41 and an outer pivot element 42, reciprocal connected by a
15 torsion spring (not shown), fastened to the middle joint
element 20 and the lower joint element 10 respectively, or
vice versa. The spring-load of the axle 40 may optionally
be adjusted by a torsion arm 43 that is adjusted
accordingly as mentioned above.

20 The middle joint element 20 may optionally have a
reinforcing inner wall 25 in order to attain sufficient
rigidity and strength in the element.

In figure 7, the joint 1 is stably in an intermediate
position. In this position, the lower joint element 10 and
25 the middle joint element 20 have the same position in
relation to each other, as in figure 4, since the user's
centre of gravity has not passed the rear axle 40. On the
other hand, the upper joint element 30 is tilted backwards,
such that the protruding blocking element 32 with lower
30 fitting surface 35, possibly equipped with a rotational
stopper 36, abuts against a corresponding lower fitting
surface 26 on the inner wall of the middle joint element
20, that hinders the upper joint element 30 from further
movement backwards.

I figure 8 the joint 1 is in an extreme position. In this position, the upper joint element 30 and the middle joint element 20 have the same position in relation to each other as in figure 5, as the user's centre of gravity still lies behind axle 50. However, the middle joint element 20 is tilted backward so that the protruding blocking element 11, with lower fitting surface 14, abuts against a corresponding lower fitting surface 23 on the inside of the middle joint element 20, possibly equipped with a rotational stopper 24, that hinders the middle joint element 20 from further movement backward.

Example B

Figure 9 shows an alternative embodiment of a joint 2 according to the invention as a connecting joint between a chair seat 100 and a base 200. The joint 2 functions according to the same principles as the joint 1 described above, but the joint elements will move in different sequence than in the joint 1 described earlier.

As may be seen from figures 9 and 10, the joint 2 has a Z-form making it very compact in that the joint elements 10, 20, and 30 lie mainly directly above each other in the vertical direction. Thus, this joint 2 has a narrower tilt-range in the horizontal plane when mounted on a revolving base, than the aforementioned joint 1.

In figure 11, the joint 2 is in an initial position corresponding to the joint 1 in figures 3 and 6. The joint 2 then has an angle α , for example about 8° . In this embodiment, the middle joint element 20 is restricted from further movement forward in that its protruding blocking element 11, lower fitting surface 14, which abuts against corresponding lower fitting surface 23 on the inner wall of the middle joint element 20, which is possibly equipped with a rotational stopper 24. Furthermore, the upper joint element 30 is restricted from further movement forward by

its protruding blocking element 32 with lower fitting surface 35 which abuts against a corresponding lower fitting surface 26 on the inner wall of the middle joint element 20, which possibly is equipped with a rotational stopper 26.

In figure 12 the joint 2 is in an intermediate position, corresponding to the joint 1 in figures 4 and 7. The joint 2 then has an angle β which in this case is greater than α , for example about 18° . In this position, the upper joint element 30 and the middle joint element 20 have the same position in relation to each other as in figure 11, as the user's centre of gravity has not exceeded the axle 50, which now lies behind axle 40, in contrast to example A. On the contrary, the middle joint element 20 is tilted backwards and thus hindered from further movement backwards by the protruding blocking element 11 with upper fitting surface 12, possibly equipped with a rotational stopper 13, abutting against corresponding upper fitting surface 21 on the inner wall of the middle joint element 20.

In figure 13 the joint 1 is in an extreme position, corresponding to the joint 1 in figure 5 and 8. The joint then has an angle θ which in this case is larger than α and β , for example about 30° . In this position the lower joint element 10 and the middle joint element 20 are in the same position in relation to each other, as in the previous figure 12, as the user's centre of gravity still lies behind axle 40. The upper joint element 30 is on the other hand tilted backwards and hindered from further movement backwards by the protruding blocking element 32 with upper fitting surface 33 abutting against the corresponding upper fitting surface 22 on the inside of the middle joint element 20, which possibly is equipped with a rotational stopper 27.

In the above mentioned examples A and B the distance and angle relationship between the axles 40 and 50 are

important in order to attain the intended effect of the joint. The most favourable version of the joint is dependant on factors such as the design of the chair seat, the angle of the back and the weight of the seat, as well
5 as the weight of the user, and possibly restrictions due to the design of the base. Furthermore, the angle and distance factors are influenced by possible spring-loading and the hardness of the spring. In the aforementioned example B, the dimensions of the joints are for example typically
10 about 20x15x15 cm (height x length x width) in an initial position, thereby constituting a very compact joint. Furthermore, the distance between the axles (40, 50) is for example typically about 12 cm, with an angle of about 60° between a line through the axles 40 and 50 and a horizontal
15 plane in an initial position. The horizontal distance between the axles (40, 50) may for example be about 6-10 cm, but may vary widely in relation to the design. The joint may be produced in any suitable material such as a metal, a plastic material or a composite material,
20 preferably a metal such as steel or aluminium.

Alternative embodiments

In the above mentioned embodiments A and B, the joint elements are constructed such that the outer joint elements 10 and 30 have blocking elements 11 and 32 respectively,
25 which extend into the middle joint element 20, but the opposite is of course also possible. The middle element 20 may thus be equipped with one or more blocking elements which either extends into one or both outer joint elements 10 and 30, with corresponding fitting surfaces on the inner
30 walls. A blocking element may further consist of several extending blocking elements cooperating with corresponding structures in the opposite joint, something that may provide more fitting surfaces and enable a larger contact area.

In an alternative embodiment, the joint 1 and 2 may have more joint elements and axles in order to have several intermediate stable positions. Furthermore, the stable positions may be adapted to the intended use. In this
5 situation, the spring-loading in one or more of the axles may be reversed in order to attain other initial positions or effects, for example.

In an alternative, the initial position may for example be the intermediate position described earlier, so that the
10 joint may tilt forwards or backwards according to the user's desire, which may be useful in an office chair. In this respect, the allowed backward deflection angle may be greater than forward, and a possible spring-loading may be tighter forward than backward, or vice versa.

15 In another alternative, the function of the joint may be to enable tilting of the chair forwards in two or more stable positions, such as in an office chair. The seat of the chair 100 may then for example be mounted to the joint 1 or 2 in the opposite direction of that which has been
20 described earlier.

Further, the joint of the present invention may be used to obtain tilting of furniture in direction other than forwards or backwards, such as to the side or a combination thereof, in order to adapt to the possibilities of the use
25 of the furniture. This may for example be obtained in that the joint may contain non-parallel axles, or by using two or more joints rotated in relation to each other in the horizontal plane.

Further, the joint according to the invention may be used
30 together with any seat of the chair or furniture with any design. Such a chair may also be a chair without a back of the chair, such as a stool, or a chair wherein the user has a sitting position which is supported both at the knees and the behind.

The spring-load may possibly be obtained by other spring types than torsion springs, such as for example a coil spring, plate spring or other elastic material.

The spring-loading of the rotational axis (40, 50) is, as
5 mentioned, not necessary but gains greater importance if
the horizontal distance between the rotational axis (40,
50) is small. In an alternative embodiment, the rotational
axis (40, 50) may be positioned horizontally above each
other, and a difference in spring load of the two
10 rotational axis (40, 50) will then make a stable
intermediate tilting position possible.

Claims

1. A mobile joint (1) for a seating construction, especially a chair, for mounting between a seat device (100) of a seating construction and a support (200) for this, comprising at least two joint elements (10,30) which are reciprocal limited pivoted between two extreme positions in order to allow a tilting movement of the sitting arrangement, effected by the users weight displacement,
- 10 characterised in that it contains two outer joint elements (10, 30) which are pivoted related with a middle joint element (20), wherein the rotational axis (40, 50), between the two outer joint elements (10, 30) and the middle joint element (20), is displaced in relation to each other in the
- 15 horizontal direction, whereby the joint (1) may take a stable tilting position between the two extreme positions.
2. A mobile joint (1) according to claim 1, characterised in that the middle joint element consists of at least two joint elements, wherein the joint (1) may take
- 20 several stable tilting positions between the two extreme positions.
3. A mobile joint (1) according to claim 1, characterised in that the horizontal distance between the rotational axis (40, 50) lies in the range of about 5-15
- 25 cm, preferably in the range of about 6-10 cm.
4. A mobile joint (1) according to one of the claims 1-3, characterised in that the tilting positions are restricted by reciprocal cooperating fitting surfaces (12, 21; 14, 23; 33, 22; 35, 26) between the joints.
- 30 5. A mobile joint (1) according to claim 4, characterised in that one or both of the cooperating fitting surfaces (12, 21; 14, 23; 33, 22; 35, 26) are equipped with rotational stoppers (13, 24, 34, 36).

6. A mobile joint (1) according to one of the claims 1-5, characterised in that at least two of the joint elements (10, 20, 30) are spring-loaded in relation to each other.

7. A mobile joint (1) according to claim 6,
5 characterised in that the spring-loading is obtained by a torsion spring, a spring coil, a plate spring or other elastic material, preferably a torsion spring, wherein the spring load is preferably adjustable.

8. A mobile joint (1) according to one of the preceding
10 claims,
characterised in that at least two joint elements (10, 20, 30) may be locked in relation to each other.

9. A mobile joint (1) for seating construction, especially a chair, for mounting between a seat device (100) of the
15 seating construction and a support (200) for the same,
comprising at least two joint elements (10,30) which are reciprocal restricted pivoted against the force of a spring-load between the two extreme positions in order to allow tilting movement of the seating construction effected
20 by weight displacement of the user,
characterised in that it comprises two outer joint elements (10, 30) which are pivoted related with a middle element (20), wherein the rotational axis (40, 50) between the two outer joint elements (10, 30) and the middle joint element
25 (20) have different spring-loading in relation to each other, whereby the joint (1) may take a stable tilting position between the two extreme positions.

10. A chair comprising a seat device (100), a base (200) and a mobile joint (1) connecting the seat device (100)
30 with the basis (200),
characterised in that the mobile joint (1) is designed according to one of the preceding claims.

Fig. 1

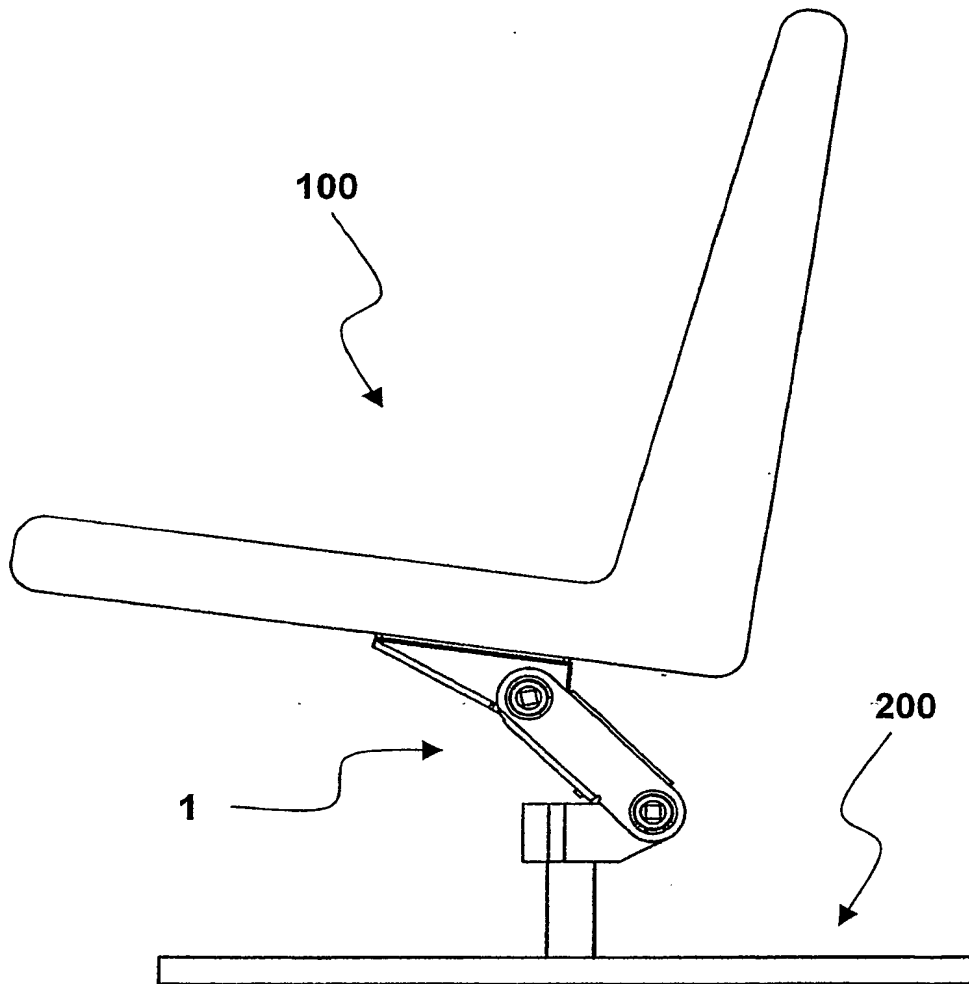


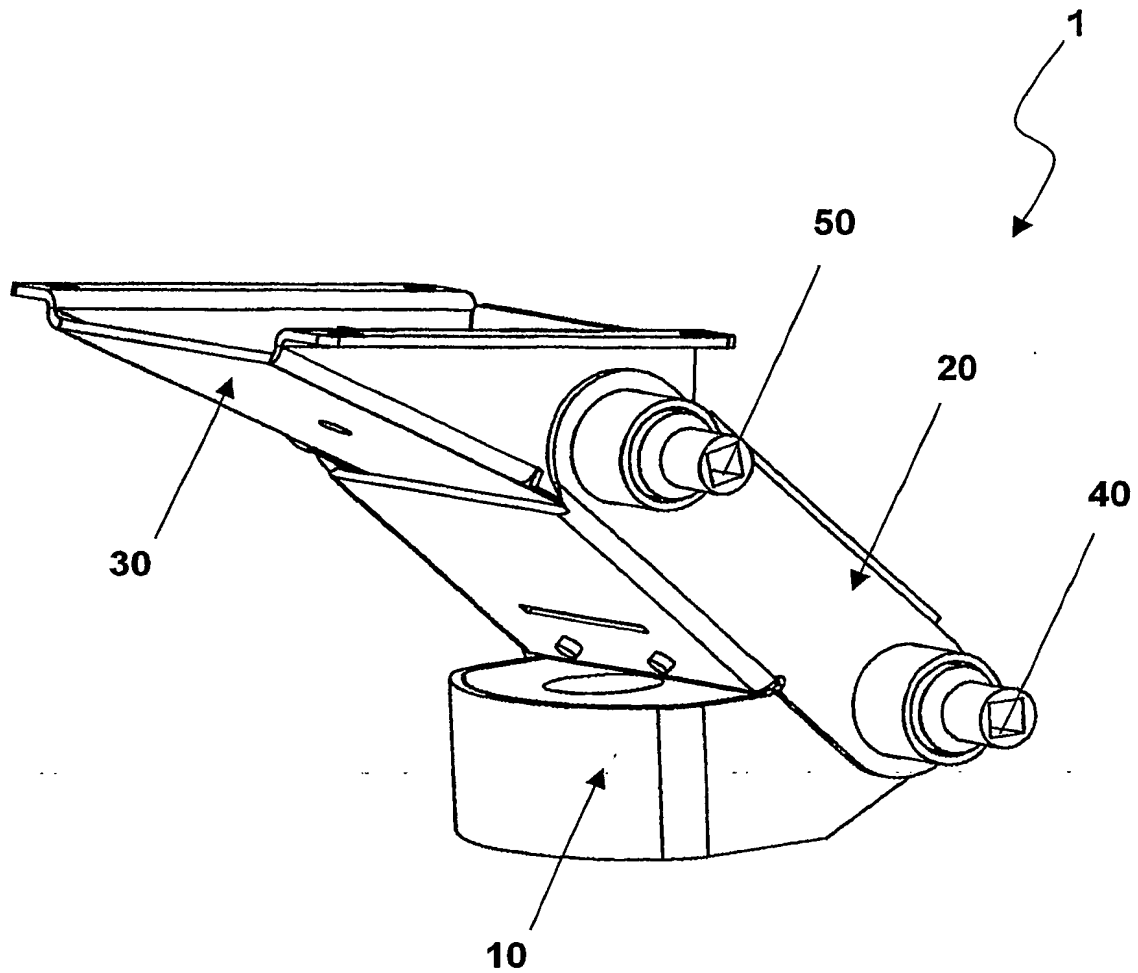
Fig. 2

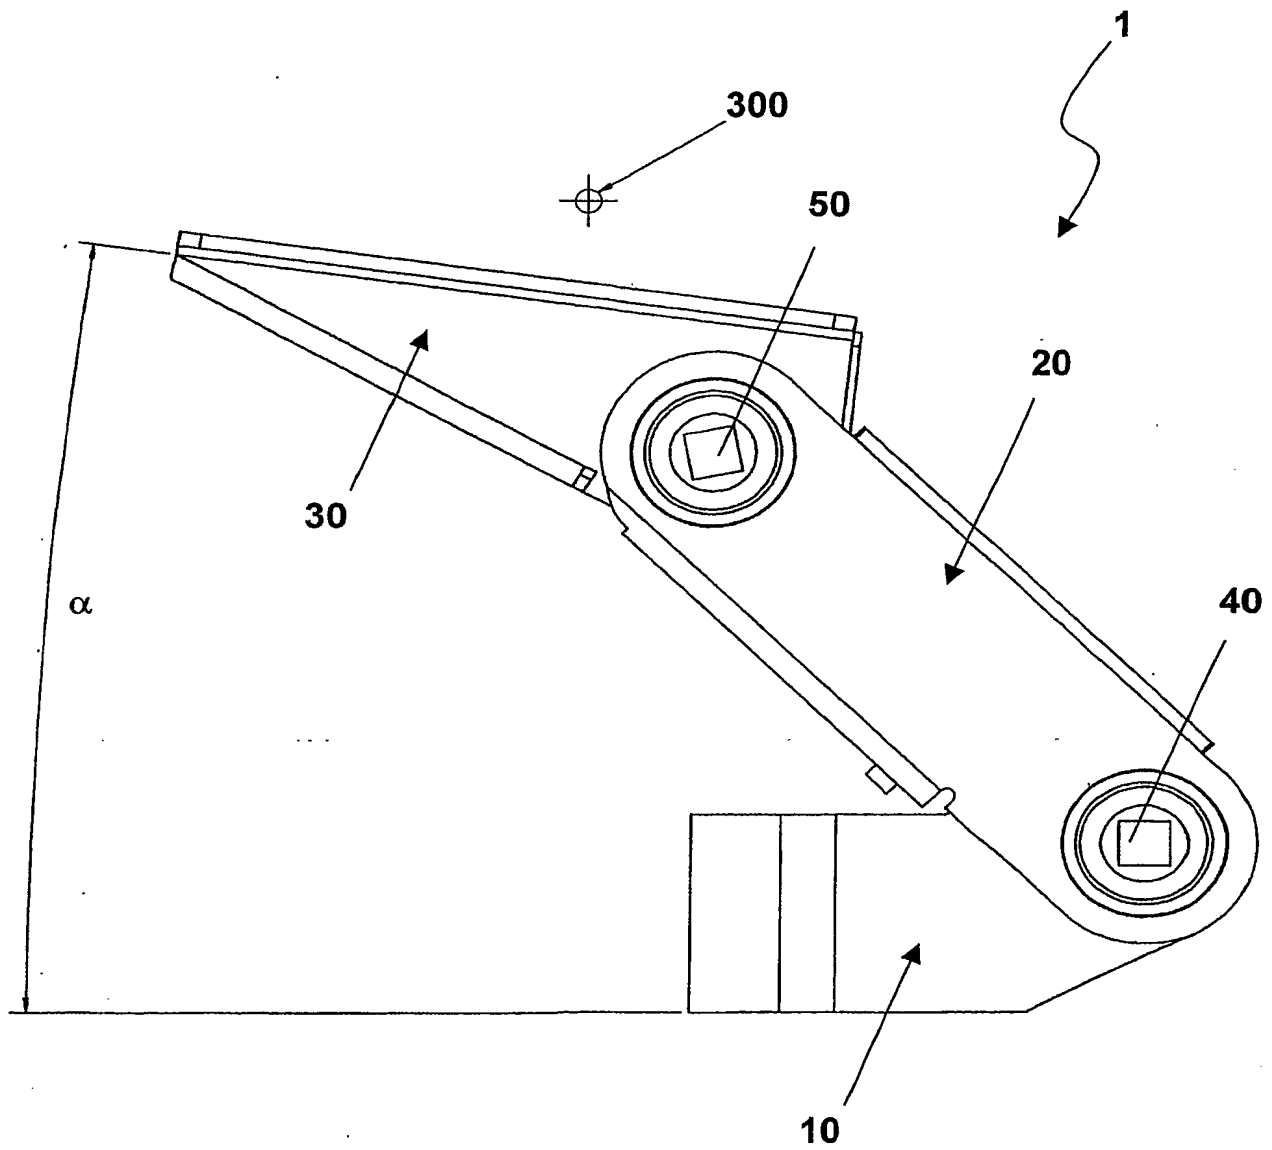
Fig. 3

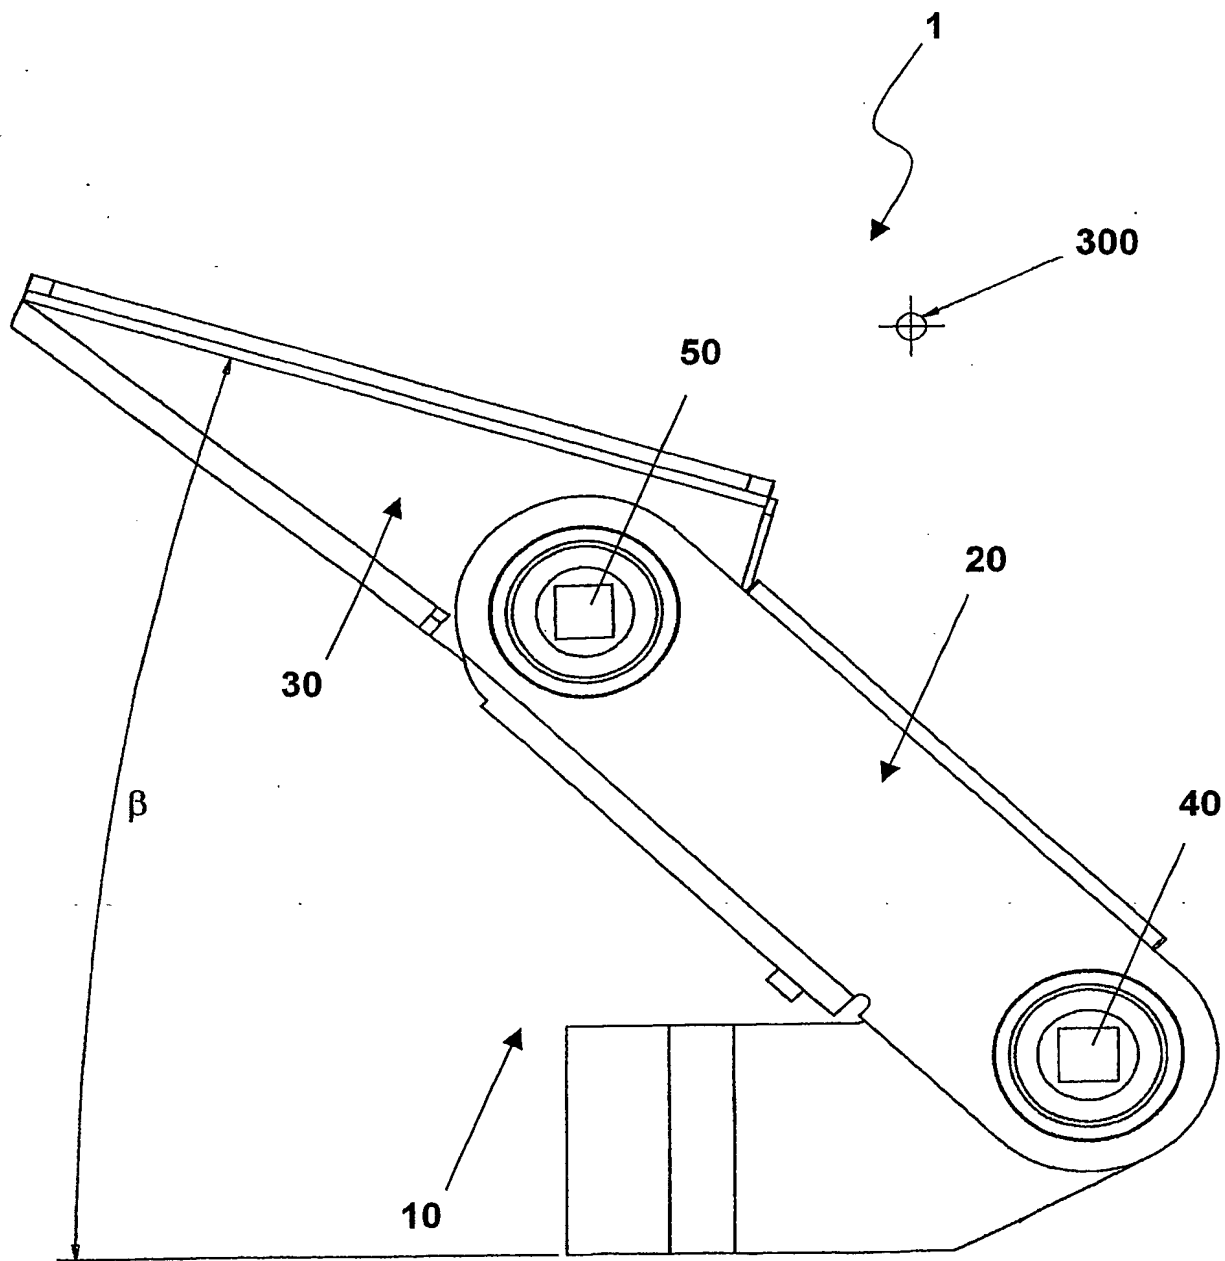
Fig. 4

Fig. 5

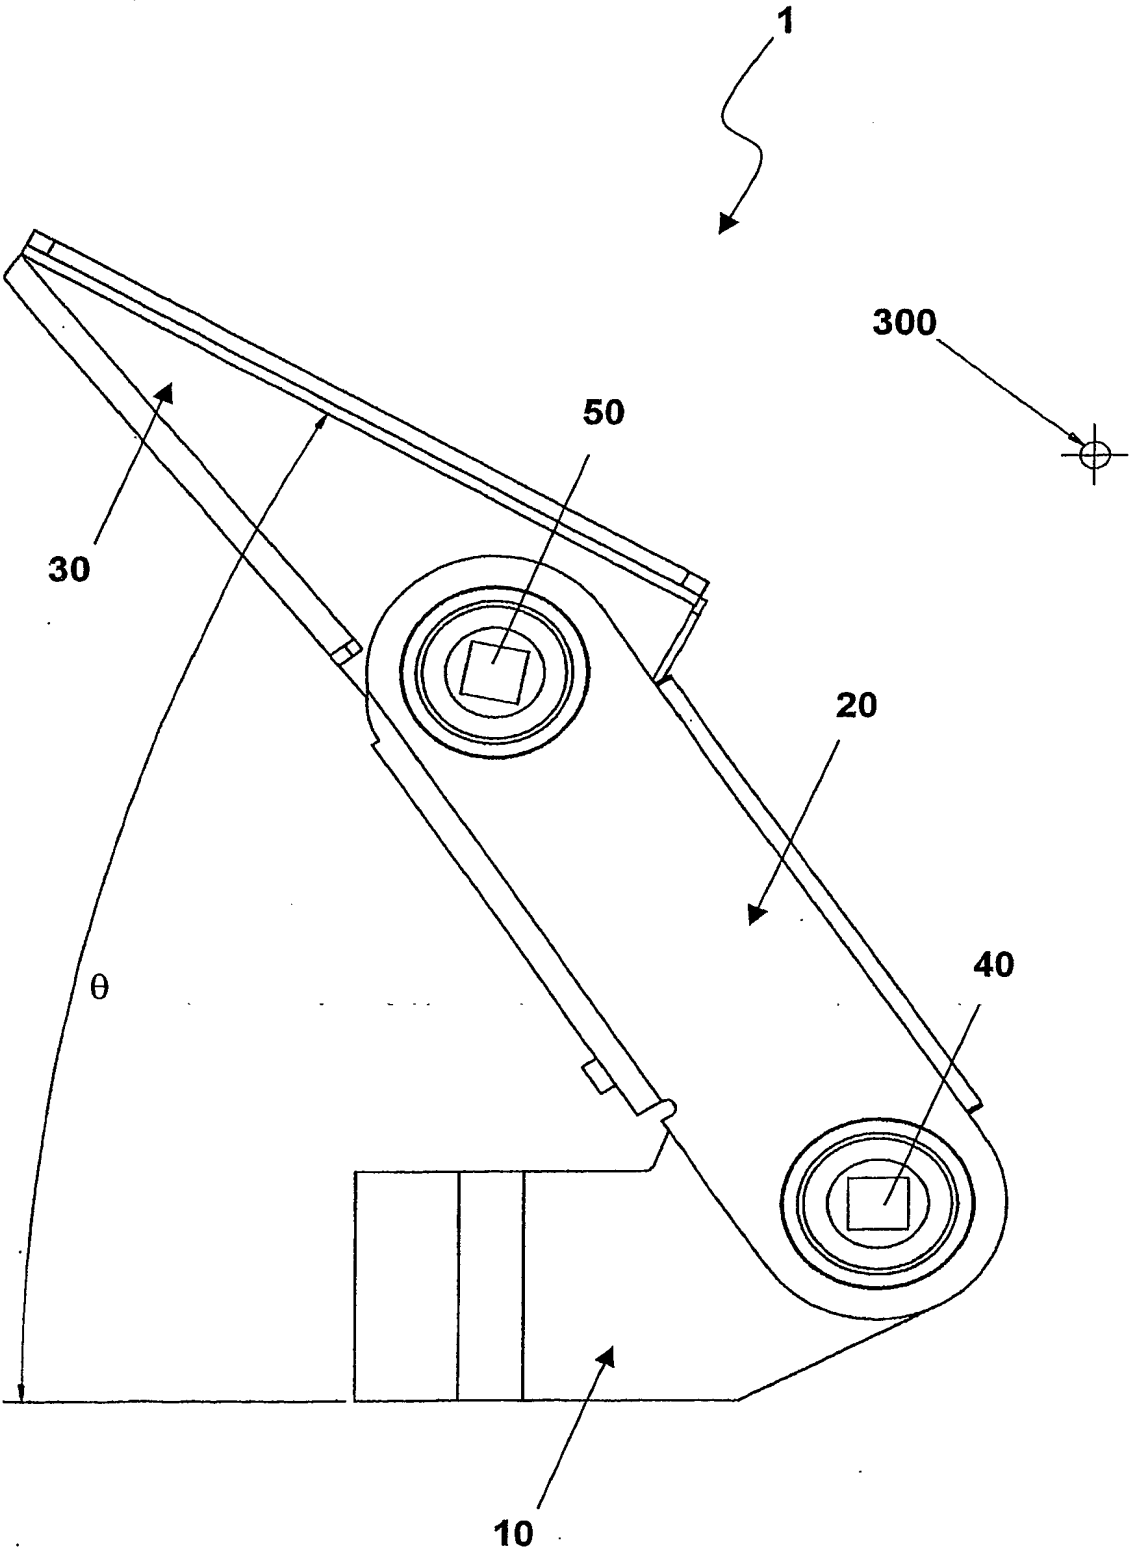


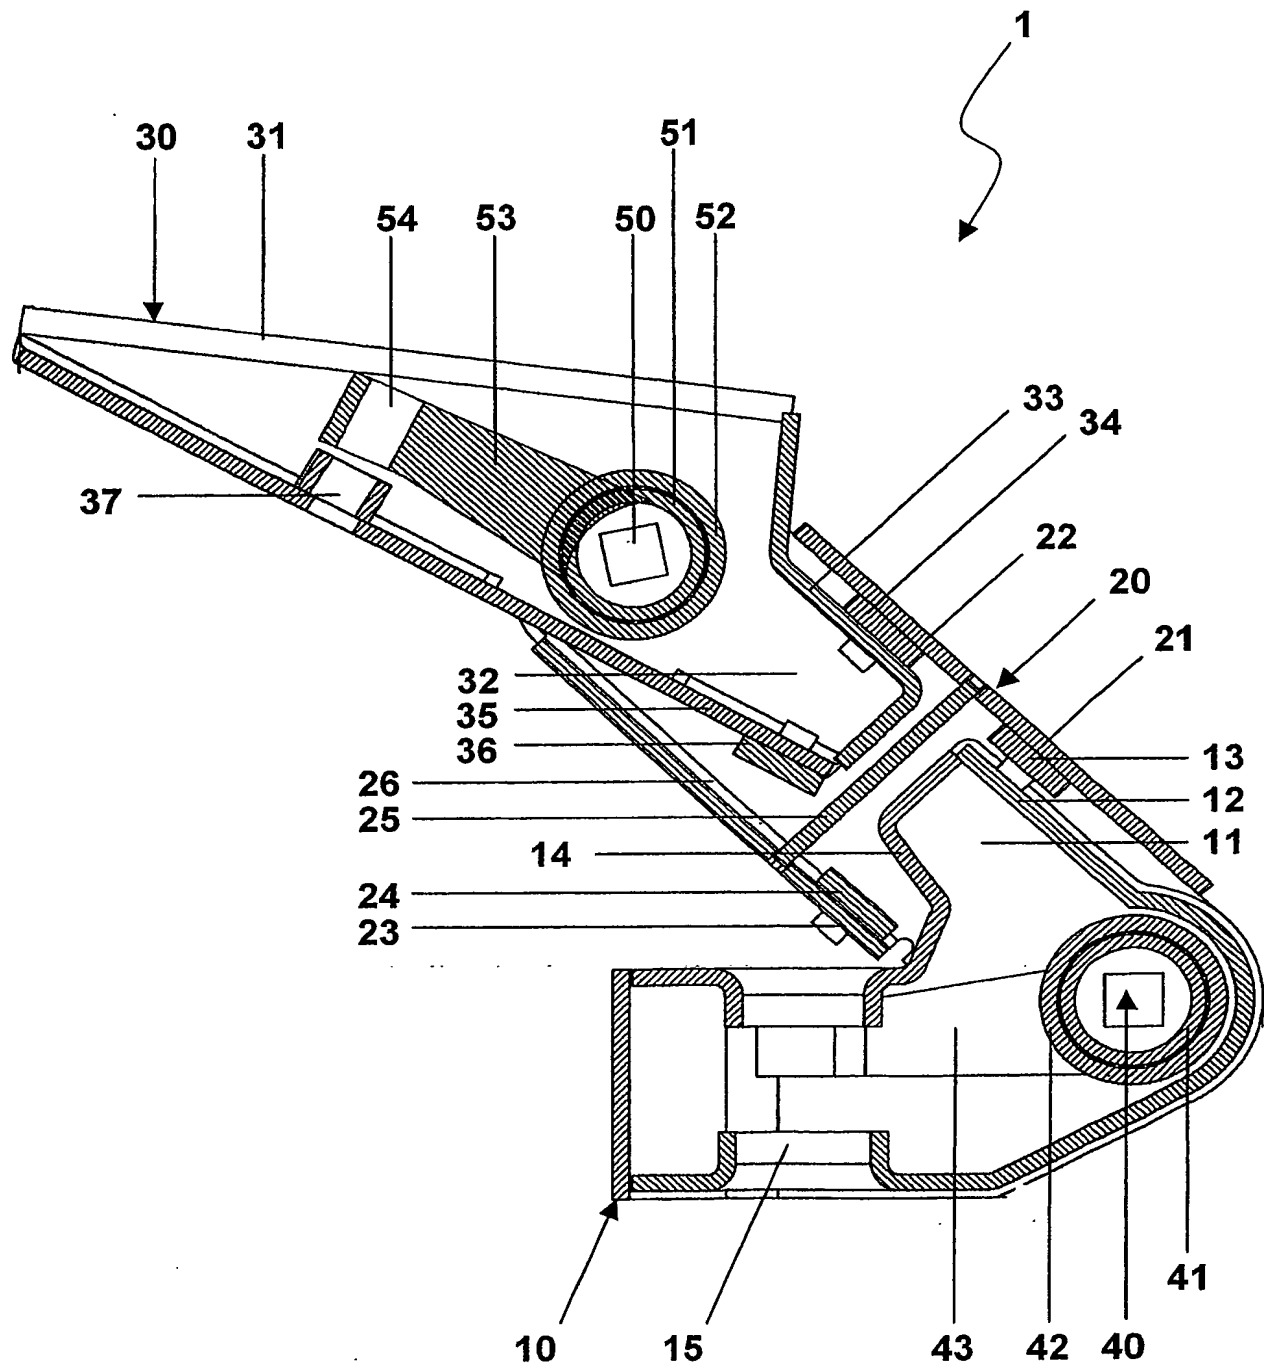
Fig. 6

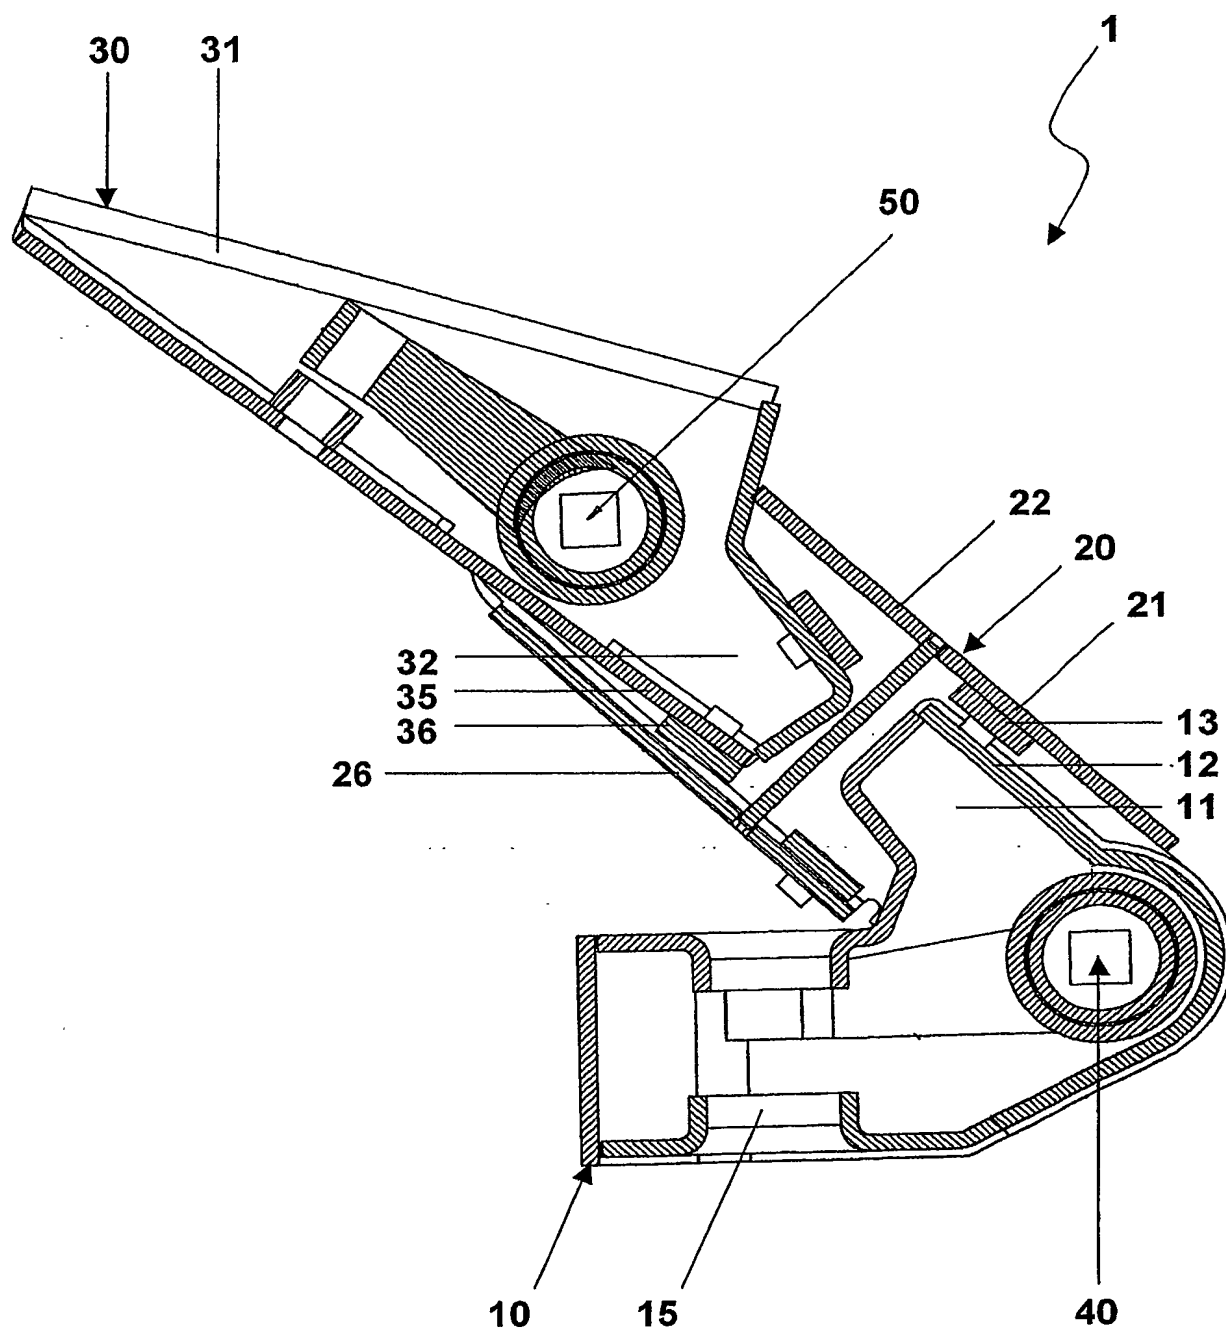
Fig. 7

Fig. 8

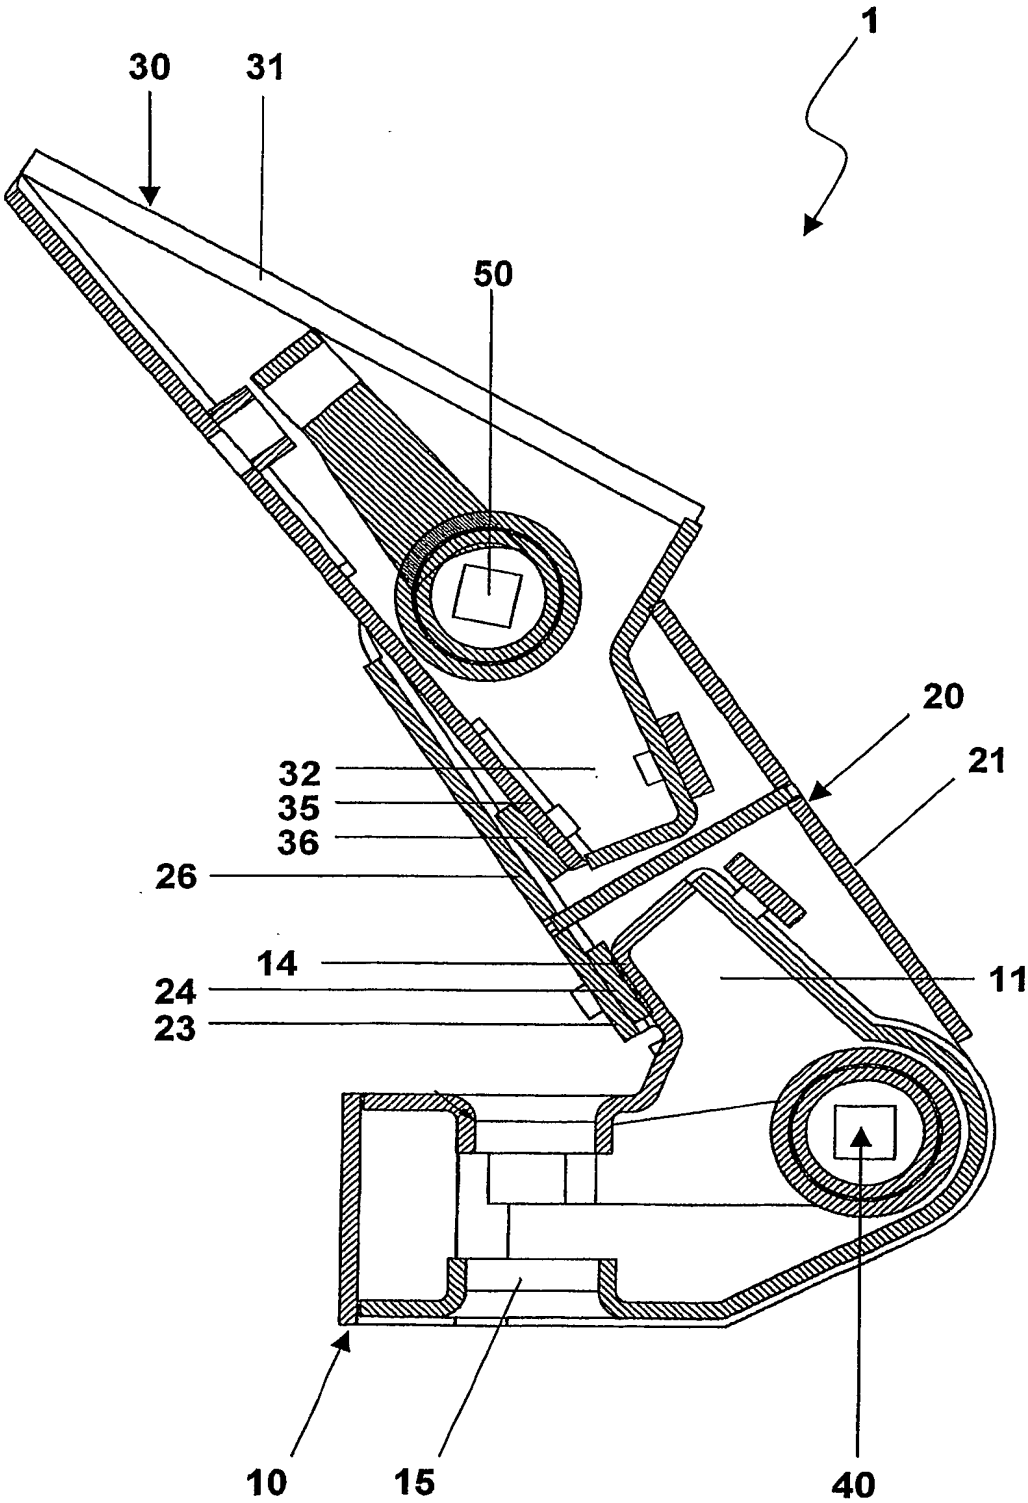


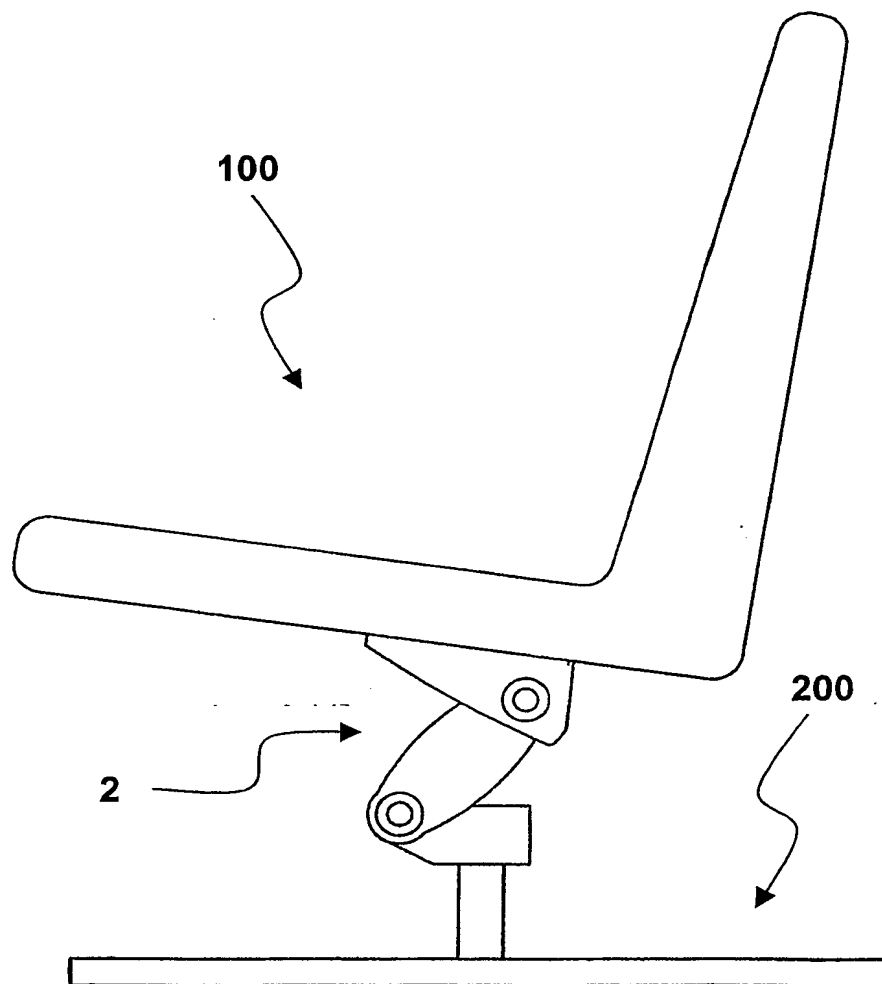
Fig. 9

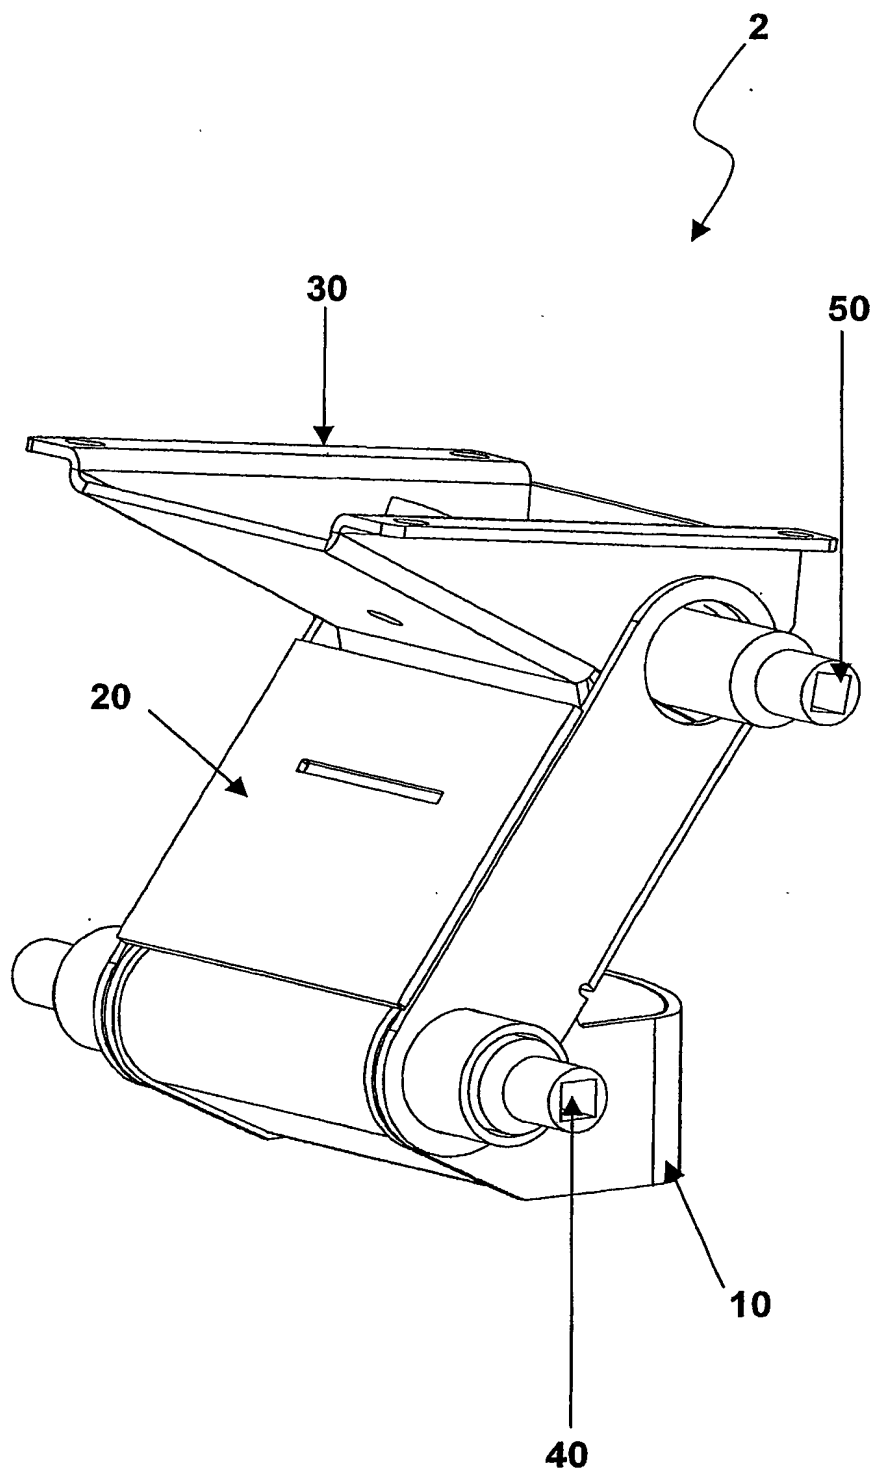
Fig. 10

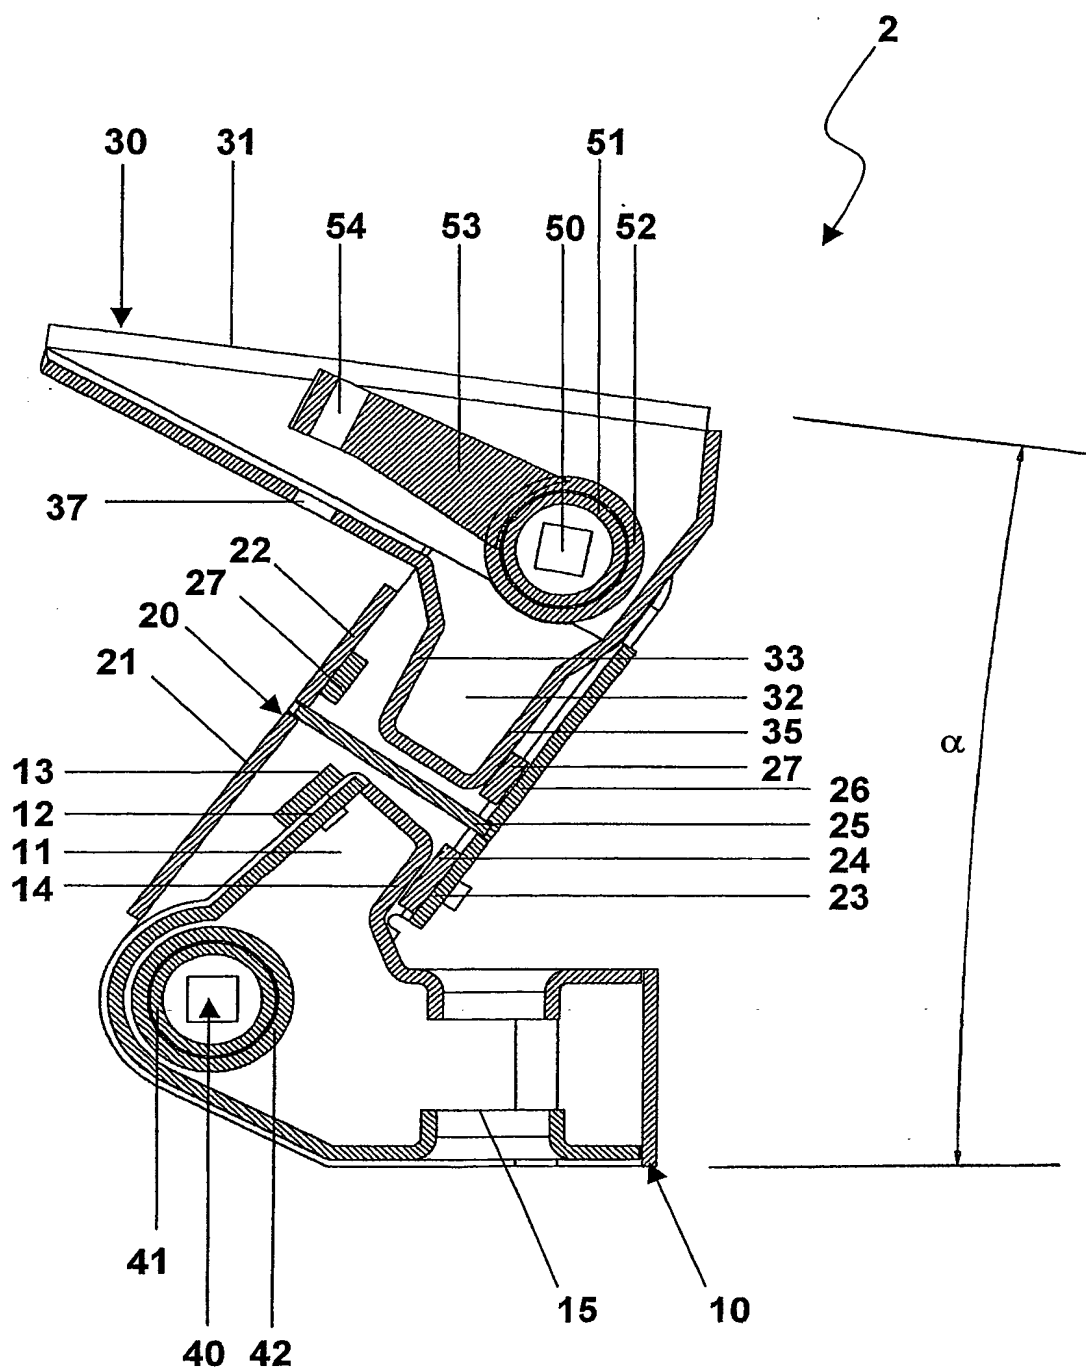
Fig. 11


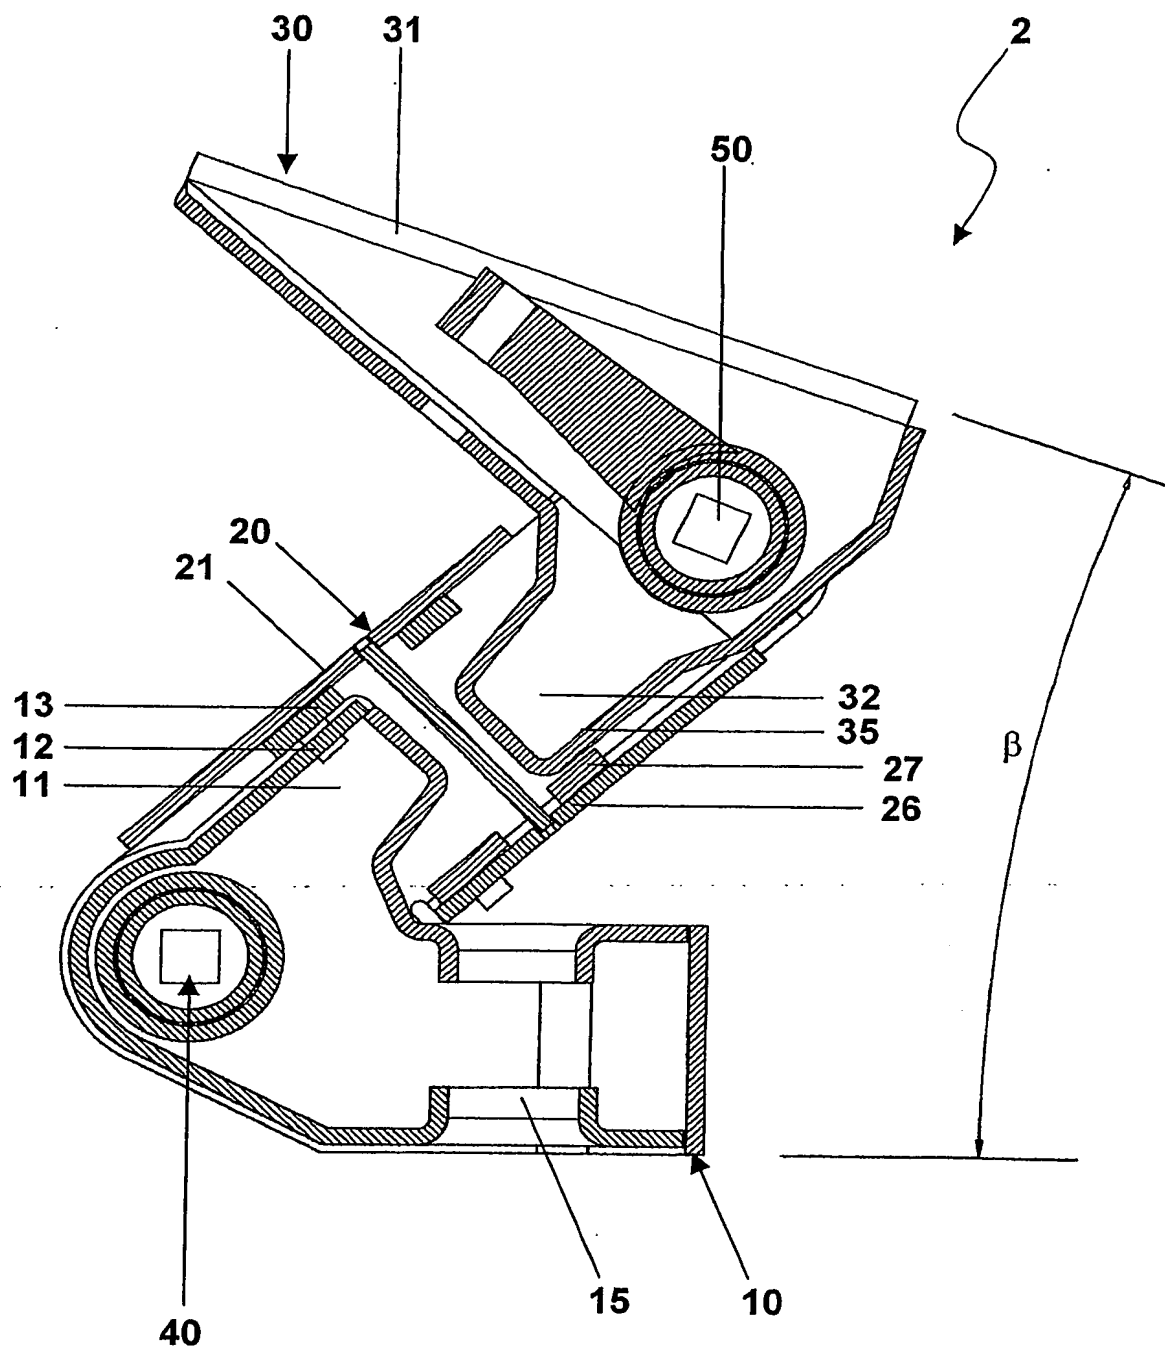
Fig. 12

Fig. 13

CORRECTED VERSION

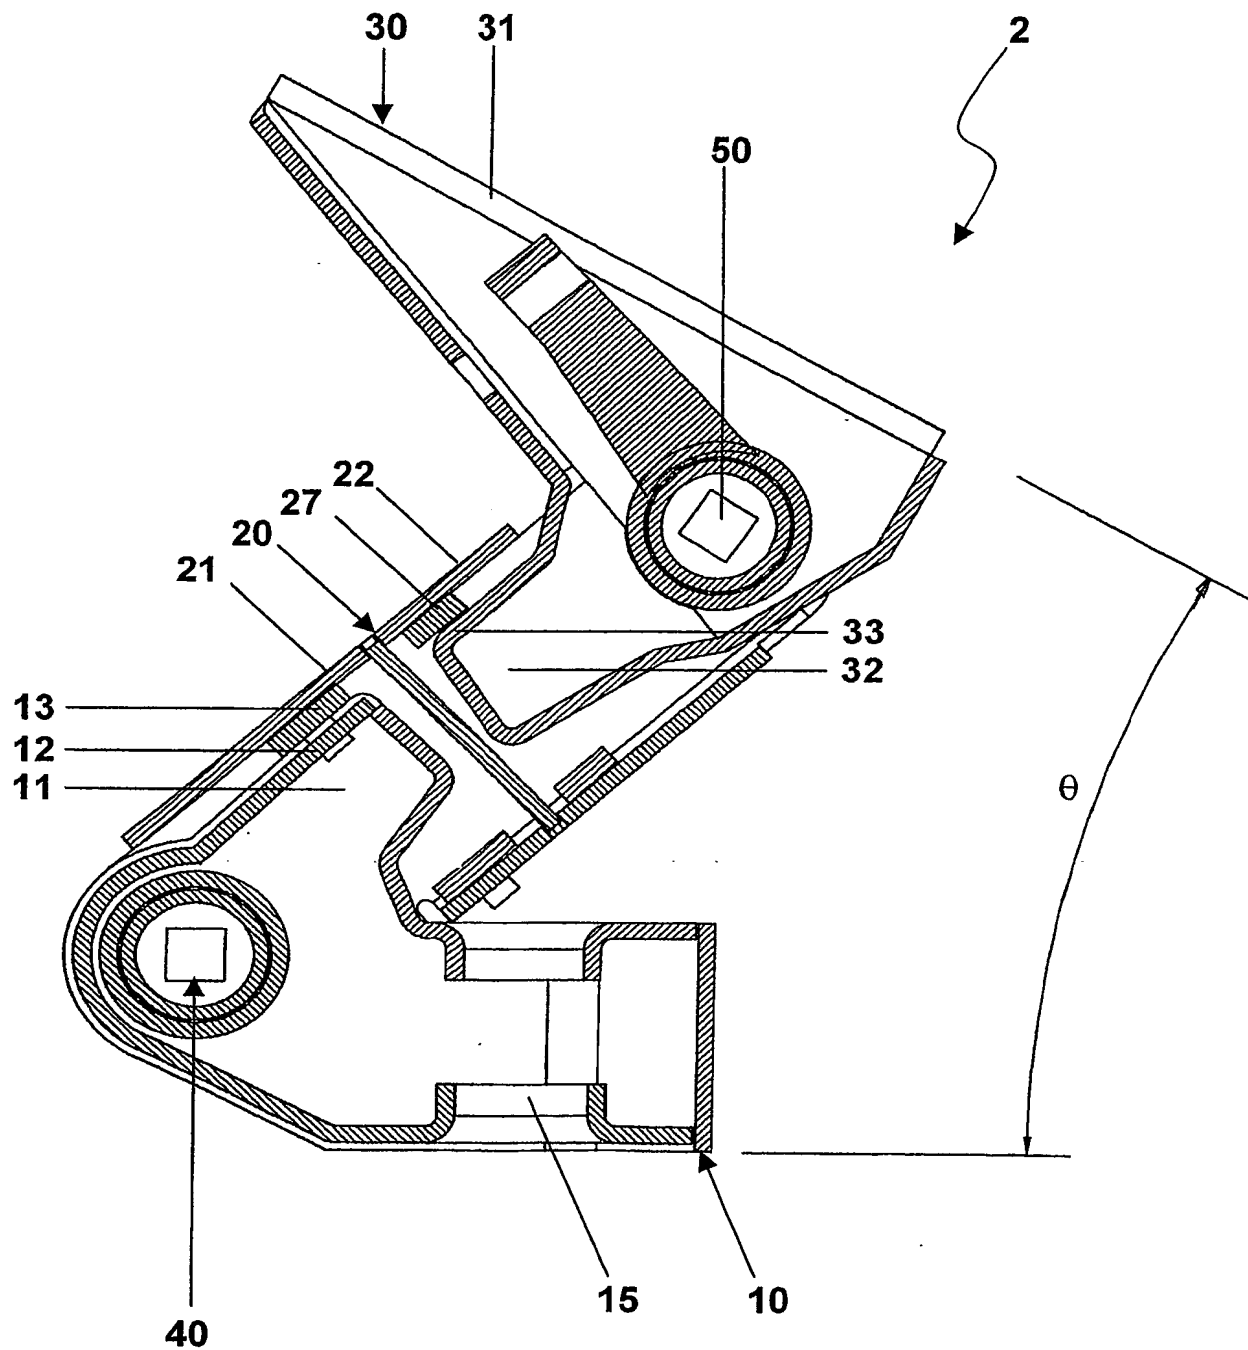(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
10 July 2003 (10.07.2003)

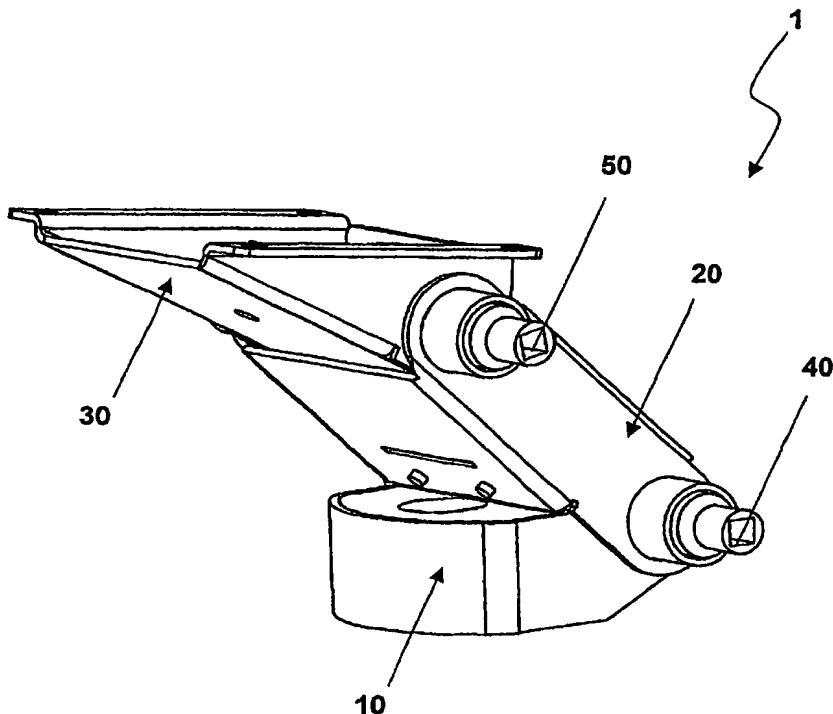
PCT

(10) International Publication Number
WO 2003/055357 A1

- (51) International Patent Classification⁷: **A47C 1/032**,
3/026 // 9/02
- (21) International Application Number:
PCT/NO2003/000001
- (22) International Filing Date: 6 January 2003 (06.01.2003)
- (25) Filing Language: Norwegian
- (26) Publication Language: English
- (30) Priority Data:
20020045 4 January 2002 (04.01.2002) NO
- (71) Applicant (for all designated States except US): **STOKKE
GRUPPEN AS** [NO/NO]; N-6260 Skodje (NO).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **WULLUM, Ole, Pet-
ter** [NO/NO]; Høiliveien 17, N-7052 Trondheim (NO).
- (74) Agent: **OSLO PATENTKONTOR AS**; P.O. Box 7007 M,
N-0306 Oslo (NO).
- (81) Designated States (*national*): AE, AG, AL, AM, AT (uti-
lity model), AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA,
CH, CN, CO, CR, CU, CZ (utility model), CZ, DE (uti-
lity model), DE, DK (utility model), DK, DM, DZ, EC, EE
(utility model), EE, ES, FI (utility model), FI, GB, GD, GE,
GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ,
LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN,
MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC,
SD, SE, SG, SK (utility model), SK, SL, TJ, TM, TN, TR,
TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, SE, SI,

[Continued on next page]

(54) Title: MOBILE JOINT WITH SEVERAL STABLE POSITIONS, SUITABLE FOR USE IN FURNITURE



(57) Abstract: The present invention relates to a mobile joint (1) for a seating construction, especially a chair, for mounting between a seat device and a base, comprising at least two joint elements (10, 30) which are reciprocally restricted pivoted between two extreme positions to allow tilting movement of the seating construction effected by the users weight displacement, comprising two outer joint elements (10, 30) which are pivoted related with a middle joint element (20), wherein the rotational axis (40, 50) between the two joint elements (10, 30) and the middle joint element (20) is displaced in relation to each other in the horizontal direction, whereby the joint (1) may assume a stable tilting position between the two extreme positions.



SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

GR, HU, IE, IT, LU, MC, NL, PT, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG)

— of inventorship (Rule 4.17(iv)) for US only

Declarations under Rule 4.17:

— as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii)) for the following designations AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW, ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB,

Published:

— with international search report

(48) Date of publication of this corrected version:

2 September 2004

(15) Information about Correction:

see PCT Gazette No. 36/2004 of 2 September 2004, Section II

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

INTERNATIONAL SEARCH REPORT

International application No.

PCT/NO 03/00001

A. CLASSIFICATION OF SUBJECT MATTER

IPC7: A47C 1/032, A47C 3/026 // A47C 9/02

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7: A47C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-INTERNAL, WPI DATA

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5080435 A (DESANTA), 14 January 1992 (14.01.92), figure 1, abstract --	1-10
X	US 5150948 A (VÖLKE), 29 Sept 1992 (29.09.92), figures 1-2, abstract -- -----	1-10

☐ Further documents are listed in the continuation of Box C.
 ☒ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

4 April 2003

Date of mailing of the international search report

14-04-2003

Name and mailing address of the ISA/

Swedish Patent Office

Box 5055, S-102 42 STOCKHOLM

Facsimile No. +46 8 666 02 86

Authorized officer

Jenny Petersson / JA A

Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT

Information on patent family members

28/02/03

International application No.

PCT/NO 03/00001

Patent document cited in search report			Publication date	Patent family member(s)		Publication date
US	5080435	A	14/01/92	DE	4019876 A,C	02/01/92
US	5150948	A	29/09/92	CA	2025259 A	17/03/91
				DE	3930983 A,C	28/03/91
				EP	0418731 A	27/03/91
				JP	3121013 A	23/05/91